
LIFEP 4 Technical Specifications Summary

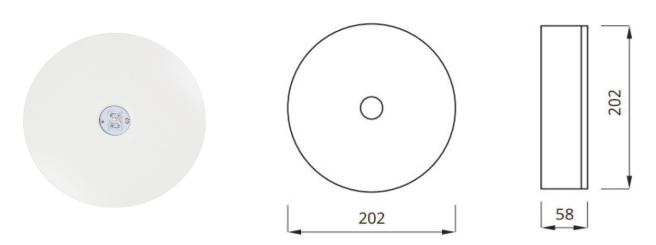

A stylish and compact circular IP65 3 Watt or 6 Watt LED Bulkhead suitable for ceiling mounting applications. Offered as either 390 lumens (3W) or 600 lumens (6W) this is an excellent solution for tall ceiling heights in damp locations. The unit utilises LiFePO4 battery technology which provides a far longer life than traditional battery types, making this an ideal product for difficult to maintain areas.

- 3W or 6W
- Surface Mount (Ceiling)
- White Polycarbonate body
- Translucent Polycarbonate Cover
- Extra Long Life LiFeP04 cells
- Ingress Protection Rating IP65
- DDP (Deep Discharge Protection)
- Cree LEDs
- Perfect for Warehouse Applications

CODE	DESCRIPTION
ECK-3-M-T2	3W SWITCHABLE MAINTAINED
ECK-3-NM-T1	3W NON-MAINTAINED
ECK-3-NM-T3	3W NON-MAINTAINED, DALI, SELF TEST
ECK-6-NM-T1	6W NON-MAINTAINED

Technical Details

Mains Supply	230-240V AC 50/60 Hz
Power Rating	$55 \text{mA} \lambda = 0.6 \text{ Maintained}$
	$25 \text{mA} \lambda = 0.6 \text{ Maintained}$
Duration	3 Hours
Recharge Period	12 Hours – Energy saving electronic charger
Battery Size & Type	6.4V 3.0Ah LiFePO4 Cells
Battery Current Limit	1000mA
Charge Current	0-400mA Float
Rating	IP65
Light Output	3 Watts or 6 Watts
Light Source	1 x 3 Watt Cree LED or 1 x 6 Watt Cree LED
Lumen Output	390 Lumens or 600 Lumens (LDT Files available)
Warranty	4 Years