


## Technical Specifications Summary

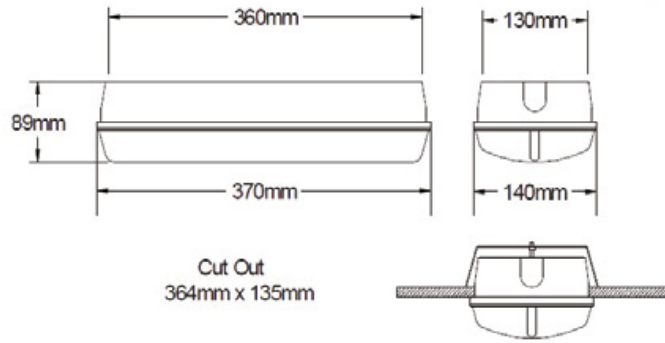

The ENN is a high output emergency LED bulkhead which is designed for high ceiling applications.

The high output LED strip use in this fitting provides 950 lumens after the diffuser in mains operation and 650 lumens in emergency operation, making this perfect for warehouse applications.

- 6W
- IP65 Ingress Protection
- Standard and DALI Self-Test Options Available
- 950 Lumen in Mains Operation
- 650 Lumen in Emergency Operation
- Suitable for High Ceilings
- Special Diffuser with High LOR

### Spacing Table:

Mounting Height	To Wall		Between Fittings	
	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux
3.0m	7.06m	5.64m	14.42m	11.28m
4.0m	7.85m	6.16m	15.70m	12.32m
5.0m	8.66m	6.64m	17.32m	13.28m
6.0m	8.90m	6.90m	17.80m	13.80m
8.0m	9.53m	6.71m	19.06m	13.40m
10.0m	9.66m	6.01m	19.32m	11.54m

CODE	DESCRIPTION
<b>ENN-6-M-T1</b>	MAINTAINED
<b>ENN-6-NM-T3</b>	NON-MAINTAINED, DALI, SELF TEST
<b>ENN-6-NM-T1</b>	NON-MAINTAINED

ACCESSORIES
CODE Description
<b>ENN-LG-KIT</b> ADHESIVE LEGEND KIT FOR: ARROW UP, ARROW DOWN, ARROW LEFT & ARROW RIGHT
<b>EDW-SRK1</b> SEMI RECESSING KIT - TRIM PLATE & MOUNTING BRACKETS

### Technical Details

<b>Mains Supply</b>	220-240 Volts 50/60Hz
<b>Power Rating</b>	22mA $\lambda = 0.85$
<b>Duration</b>	3 Hours
<b>Battery Size &amp; Type</b>	7.2V 4.5Ah NiCd
<b>Rating</b>	IP65
<b>Light Source</b>	Helvar LS-282-840
<b>Lumen Output</b>	650 lumens in emergency; 950 lumens in mains
<b>Beam Angle</b>	125° x 117°
<b>Light Source Colour Temp.</b>	4000K
<b>Ta</b>	25°
<b>Dimensions</b>	360mm x 130mm x 89mm
<b>Mains Input Terminal</b>	0.5mm x 2.5mm Cable
<b>Weight</b>	2.5Kg